


XJF3090

XJFFAN

Bearing Type: Ball/Sleeve bearing

Air Flow: 28CFM

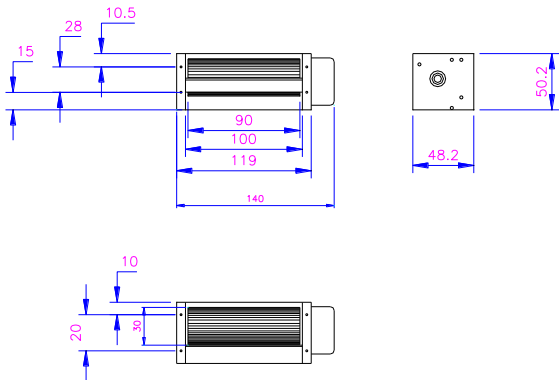

规格型号 P/N	电压 Rating Voltage(DC)	电流 Power Current (AMP)	功率 Power Consumption (WATTS)	轴承 Bearing Ball Sleeve	转速 Speed (RPM)	风量 Air Flow (CFM)	噪声 Noise (dBA)
XJF3090-DC12	12	0.25	3.0	S	4000	26	29
XJF3090-DC24	24	0.18	4.3	S	4300	28	29
XJF3090-DC12	12	0.25	3.0	B	4000	26	29
XJF3090-DC24	24	0.18	4.3	B	4300	28	29