


XJHR60180

XJHFAN

Bearing Type: Ball/Sleeve bearing

Air Flow: 136 CFM

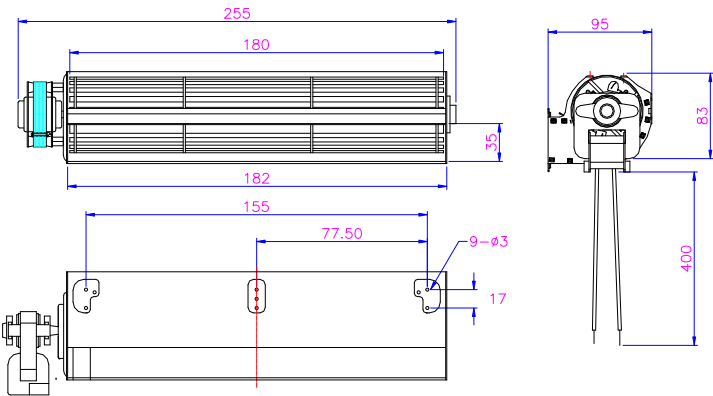

| 规格型号<br>P/N  | 电压<br>Rating<br>Voltage(VAC) | 频率<br>Frequency<br>( Hz ) | 电流<br>Power Current<br>( AMP ) | 功率<br>Power Consumption<br>( WATTS ) | 轴承<br>Bearing Ball<br>Sleeve | 转速<br>Speed<br>( RPM ) | 风量<br>Air Flow ( CFM ) | 噪声<br>Noise ( dBA ) |
|--------------|------------------------------|---------------------------|--------------------------------|--------------------------------------|------------------------------|------------------------|------------------------|---------------------|
| XJH60180-110 | 110                          | 60                        | 0.41                           | 43                                   | S                            | 2900                   | 105                    | 47                  |
| XJH60180-220 | 220                          | 50                        | 0.33                           | 40                                   | S                            | 2600                   | 95                     | 46                  |
| XJH60180-110 | 110                          | 60                        | 0.41                           | 43                                   | B                            | 2900                   | 105                    | 47                  |
| XJH60180-220 | 220                          | 50                        | 0.33                           | 40                                   | B                            | 2600                   | 95                     | 46                  |